

Ultra Low Power EMI Reduction Oscillator

Features

- FCC approved EMI attenuation
- Proprietary Low EMI Phase Modulated Sa Φ_{ic}^{TM} Oscillator
- Modulation Output Clock Enable/Disable Function
- RoHS compliant & Pb free
- AEC-Q100 compliant (option)
- Frequency range 15MHz ~ 40MHz
- Supply voltage 1.62V ~ 3.63V
- CMOS output
- Operating temperature -40~125°C
- SMD seam sealing ceramic package 2.5mm x 2.0mm

Electrical Specifications

Item	Specification
Frequency	15MHz ~ 40MHz
Supply Voltage (VDD)	1.8V ~ 3.3V ^[1] , $\pm 10\%$
Output Type	CMOS
Output Load	15 pF
Oscillation Mode	Fundamental
Frequency Stability	± 50 ppm ^{[1][2][3]}
Operation Temperature Range	-40°C ~ 125°C ^[1]
Storage Temperature Range	-55°C ~ 125°C
Output Voltage Low (V_{OL}) @ VDD = 3.3V, I_{OL} = 12mA @ VDD = 1.8V, I_{OL} = 4mA	0.2VDD Max.
Output Voltage High (V_{OH}) @ VDD = 3.3V, I_{OH} = -12mA @ VDD = 1.8V, I_{OH} = -4mA	0.8VDD Min.
Rise(T_r) / Fall(T_f) Time ^[4]	6 ns Max.
Dynamic Supply Current ^[5]	10 mA Max.
Duty Cycle ^[6]	45% ~ 55%
Start-Up Time	1 ms Max.
Phase Jitter (12kHz~5MHz)	1 ps Max. ^[3]
Aging (at 25°C)	± 3 ppm/year Max.
Modulation Output Clock Mode	Pin 1 selectable

[1] Ordering options

[2] Inclusive of frequency tolerance at 25°C, variations over operating temperature, supply voltage, load and 1st year aging at 25°C.

[3] Modulation output clock mode is disabled.

[4] T_r measure between 10% to 90%, T_f measure between 90% to 10% at 15pF load and VDD 1.8V~3.3V

[5] Measure at 24MHz, VDD 3.3V

[6] Measure at $V_{DD}/2$


Modulation Output Deviation [7], [8]

Frequency (MHz)	Deviation range (%) @25°C		
	VDD1.8V	VDD2.5V	VDD3.3V
15	± 0.067	± 0.05	± 0.042
24 / 25	± 0.11	± 0.08	± 0.07
27	± 0.12	± 0.09	± 0.08
37.125	± 0.13	± 0.10	± 0.08

[7] The deviation range can vary by ±20% over voltage and temperature.

[8] Modulation output mode is enabled, contact us for available frequencies and deviation range.


Dimensions

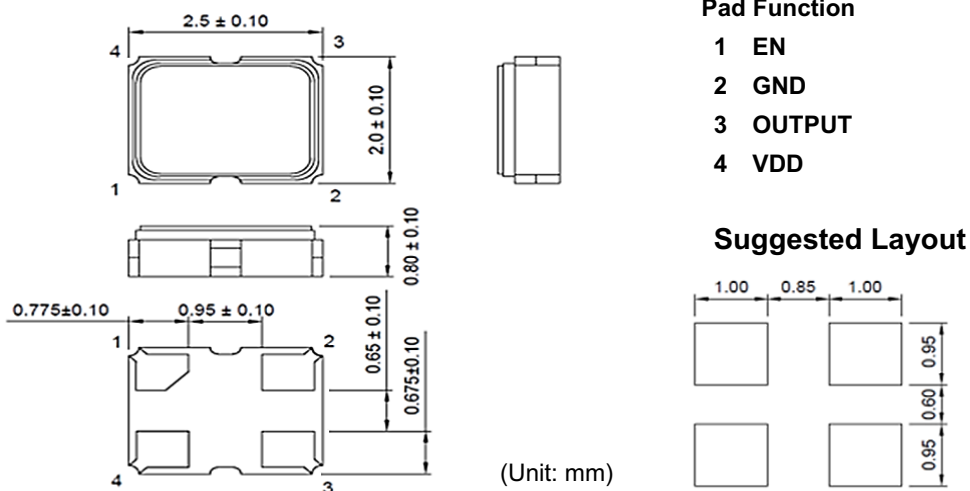


Pin Definition

Pin#	Symbol	Functionality
1	EN	Modulation Output Clock Mode Enable Pin H (Logic "1") : Enable L (Logic "0") : Disable Internal pull-high resistor
2	GND	System ground reference
3	OUTPUT	Oscillator output
4	VDD	System power supply


Marking

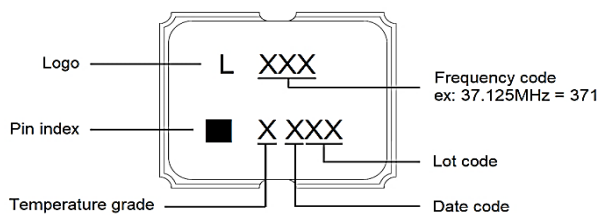

Duty Cycle Timing



Output Rise/Fall Timing



Temperature grade	Temperature range	Frequency stability (ppm)
I	-40°C ~ 85°C	±30
E	-40°C ~ 105°C	±50 / ±60
A	-40°C ~ 125°C	±50 / ±100

Ordering Information

